



Technical Announcement

IABU, DELTA ELECTRONICS, INC.

Product	DOP	Models	DOP-B Series	Confidential level	<input checked="" type="checkbox"/> General <input type="checkbox"/> Classified <input type="checkbox"/> Top secret
				ECN No.	N/A
Published by	Solution Center	Publisher	Frank Ho	Publication No.	FAE-01-D10513-001
				Date of Publication	2010/5/13
Published to	Taiwan Sales , Product Manager , DCE , DEU , DPR , DES				

Purpose:

The setting of USB DISK Mode for DOP-B series.


Description:

1. Screen Editor 2.00.17 (Firmware 2.0170) added USB DISK Mode, and the USB DISK mode could compatible with Windows XP / Windows Vista / Windows 7 operating system.
2. When using old version in Windows Vista / Windows 7 operating system, we can't upload / download program from PC to HMI via USB interface. So we have to update the firmware of HMI via the com port of PC. After updating to new version, user can upload / download program from PC to HMI via USB interface in Windows XP / Windows Vista / Windows 7 operating system.

1. Check your PC Com Port




2. Set PC Com Port in Screen Editor

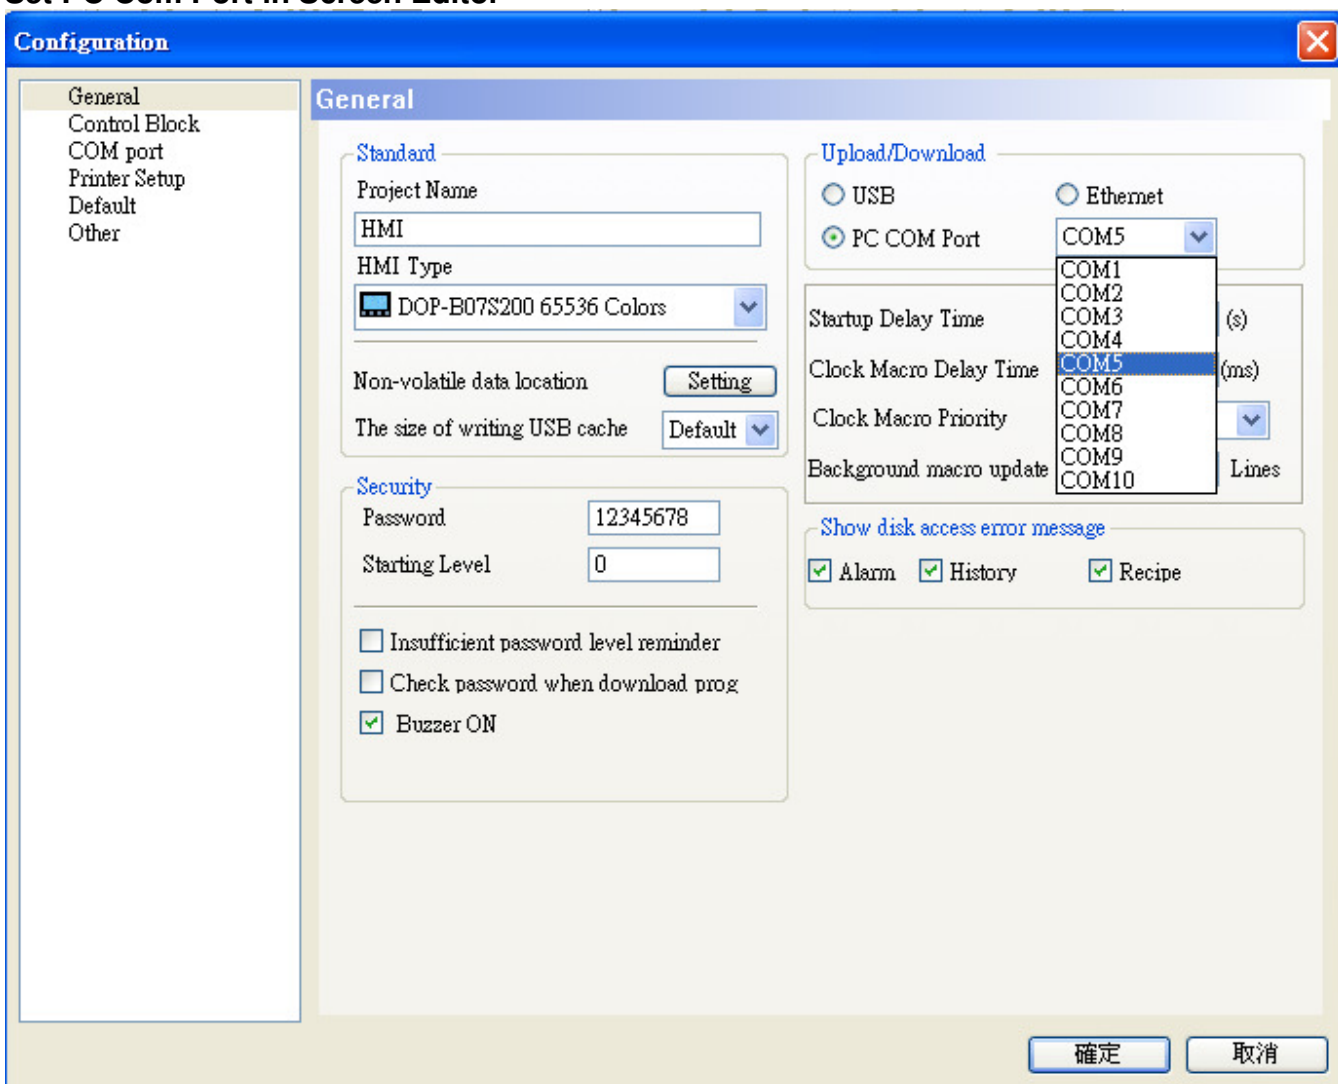


3. Select which HMI com port you want to use.


Enter system menu, press Up/down, and select Standard Mode.

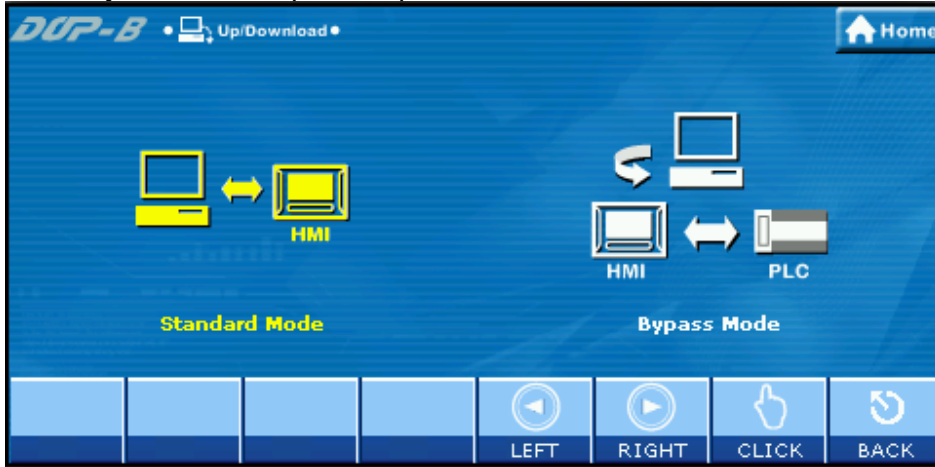

Choose which port on HMI you want to use.

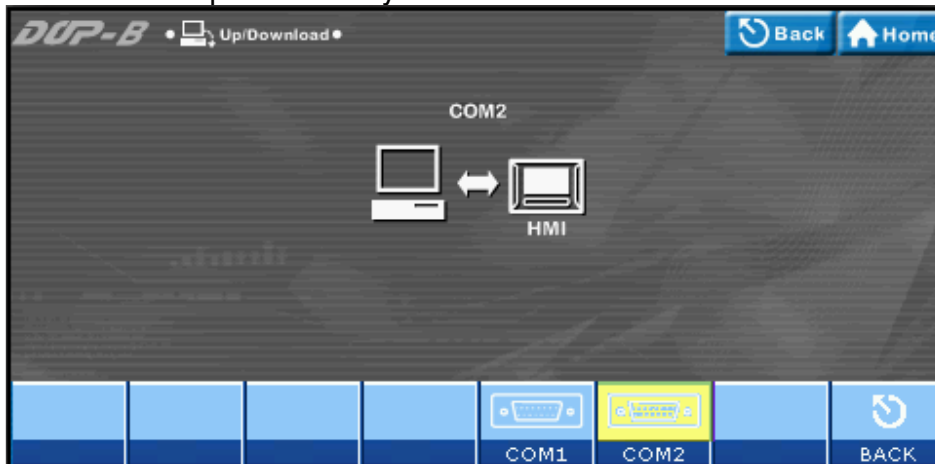


When updating the firmware, you should keep this transfer window on.

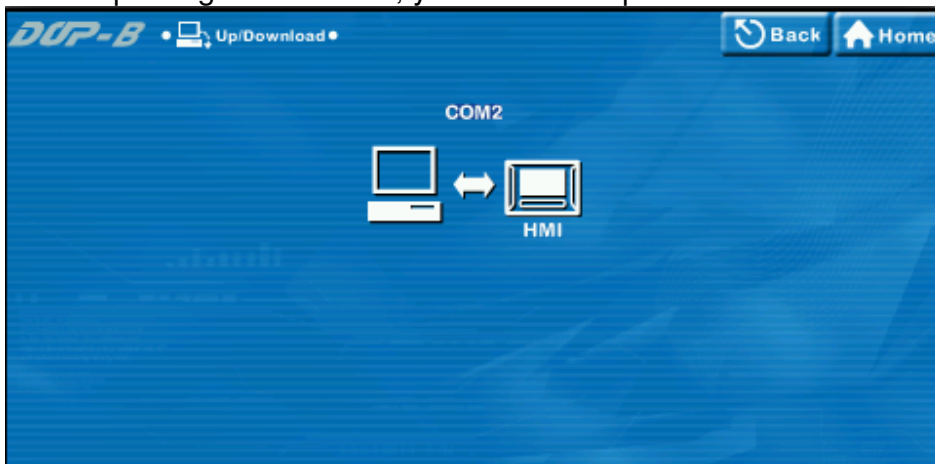


4. Press Tools / Upgrade firmware in Screen Editor.

Don't close the Up/Download transfer window of HMI when updating.

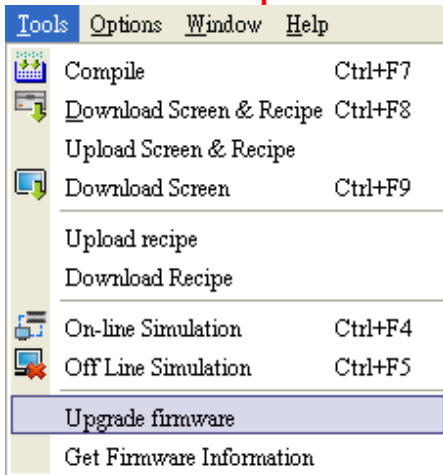

The firmware of HMI will be updated successfully.

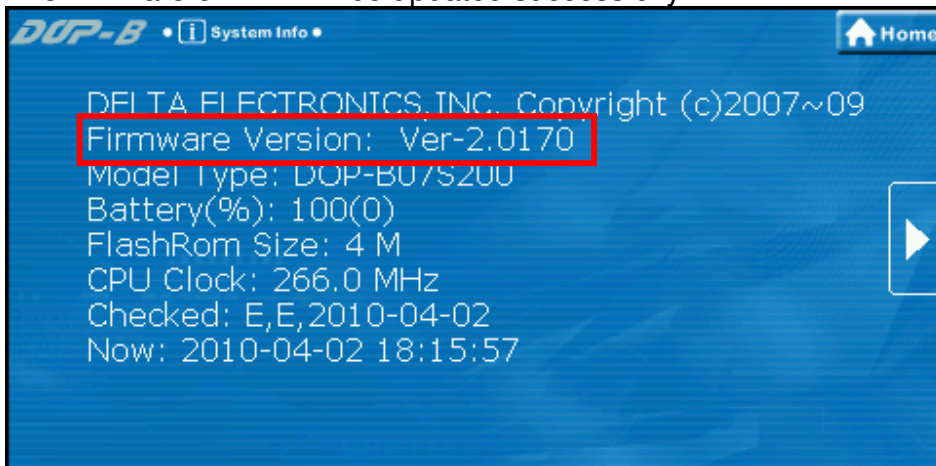

5. After updating the firmware to 2.0170 version, enter system menu, press MISC, and then **set the "USBCommMode" to 1.**



6. Now the USB DISK function of HMI will work fine.

品質至上
信賴第一
追求卓越

QUALITY
RELIABILITY
EXCELLENT