



Technical Announcement

INDUSTRY AUTOMATION BU, DELTA ELECTRONICS, INC

Product Category	DOP-HMI	Model(s)	DOP-B DOP-AE	Security Classification	<input checked="" type="checkbox"/> General <input type="checkbox"/> Confidential <input type="checkbox"/> Top-secret
				ECN No.	N/A
Issued by	HMI PSM/FAE Division	Author(s)	LANTURN LIN	Issue No.	HMI110623000
				Released Date	2011/06/23
Recipient	HMI Product Manager, BU Sales Representative, DGC, DEU, DPR, DES, DEK, DEJ, DIN				

Abstract:

The HMI team is pleased to announce the immediate release of DOP eRemote version 2.00.00. This release is an improvement, which includes new features, bug fixes and enhancements.

Description:

1. The model(s): DOP-B10E615, B07E415, B07E515, B08E515 and DOP-AE series.
2. Fixes in DOP eRemote version 2.00.00:
 - 2.1 Support firmware version v3.0022 for DOP-B network type series.
 - 2.2 Support firmware version v1.08C for DOP-AE series.
 - 2.3 Add full screen function.
 - 2.4 Add connecting HMI IP address on the title of the window function.
 - 2.5 Add use the domain name to connect the HMI function.
 - 2.6 Support new elements of DOPSoft but not rotation function.
 - 2.7 Fixed show the password table wrong issue.
3. You can download the eRemote V2.00.00 via the following link:
http://www.delta.com.tw/product/em/download/download_main.asp?act=3&pid=3&cid=2&tpid=3


Remark:

- Any further details related to this release will be notified later.


品質至上
信賴第一
追求卓越

QUALITY
RELIABILITY
EXCELLENT

1. Support firmware version v3.0022 for DOP-B network type series.

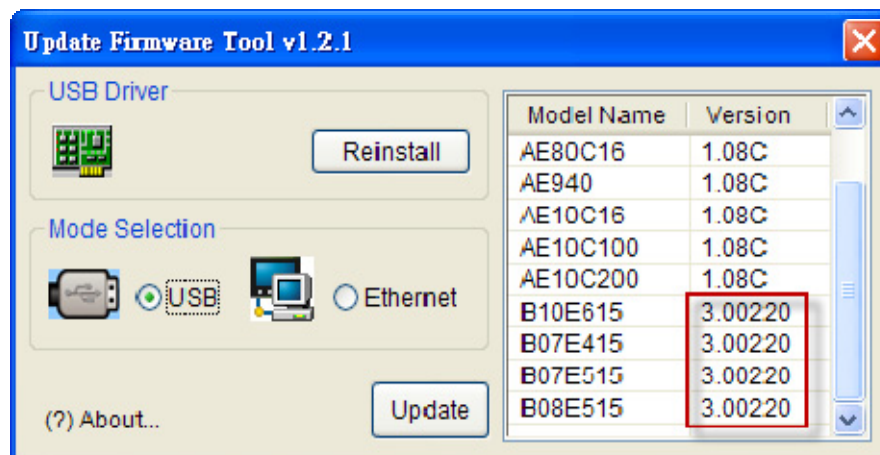


2. Support firmware version v1.08C for DOP-AE series.

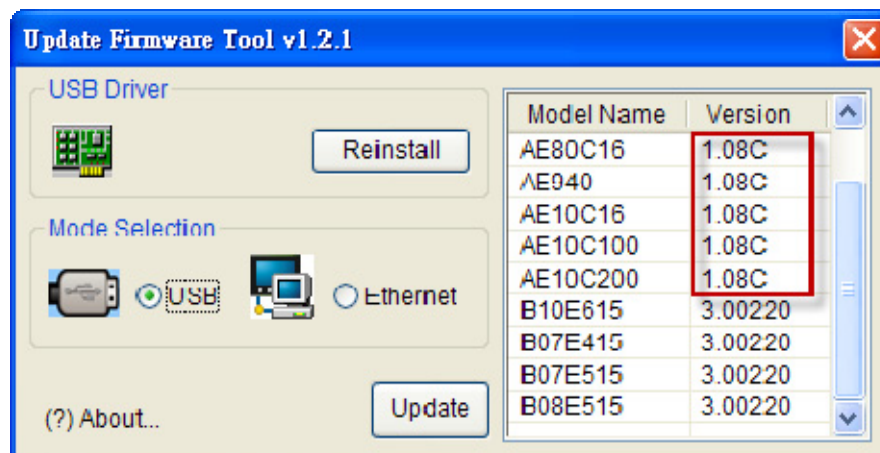


3. Add full screen function.

Press  icon to change to full screen mode.

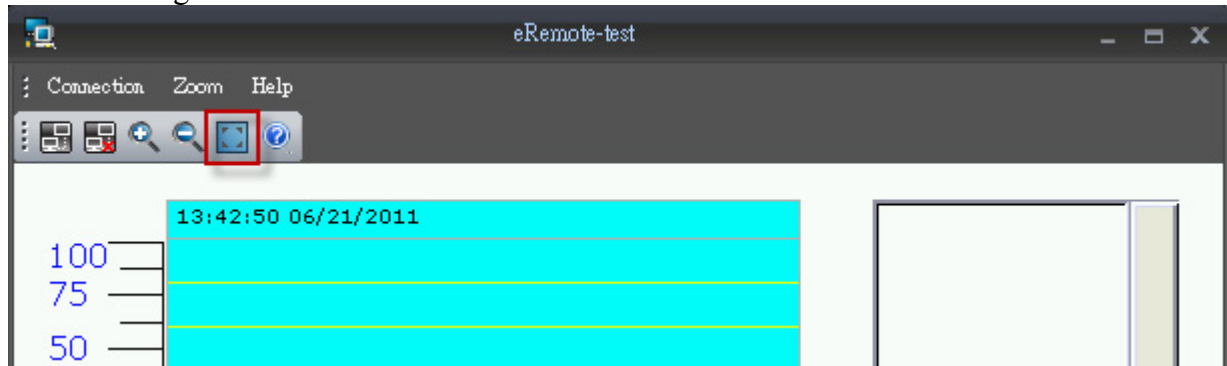


Click the right button of mouse to show screen zoom options in the full screen mode, and select "Zoom in/out" or "Reset" to return to the window mode.

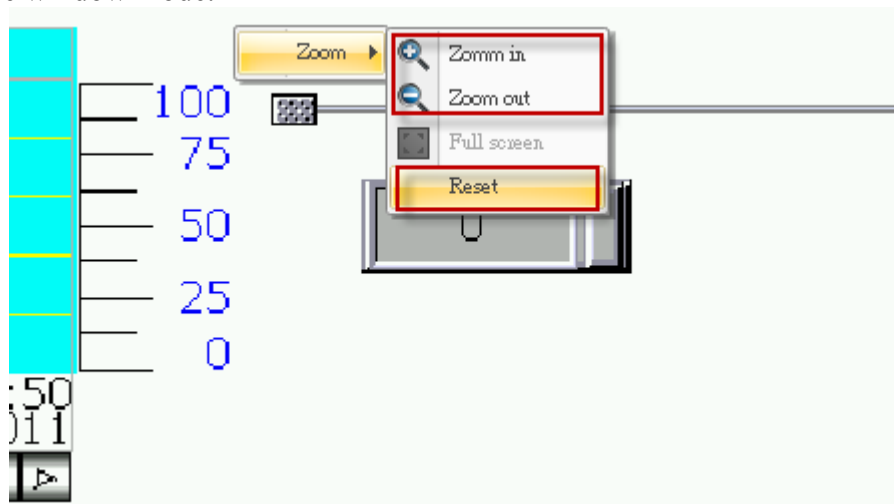


4. Add connecting HMI IP address on the title of the window function.

Users can input the known HMI IP address and click “OK” button.

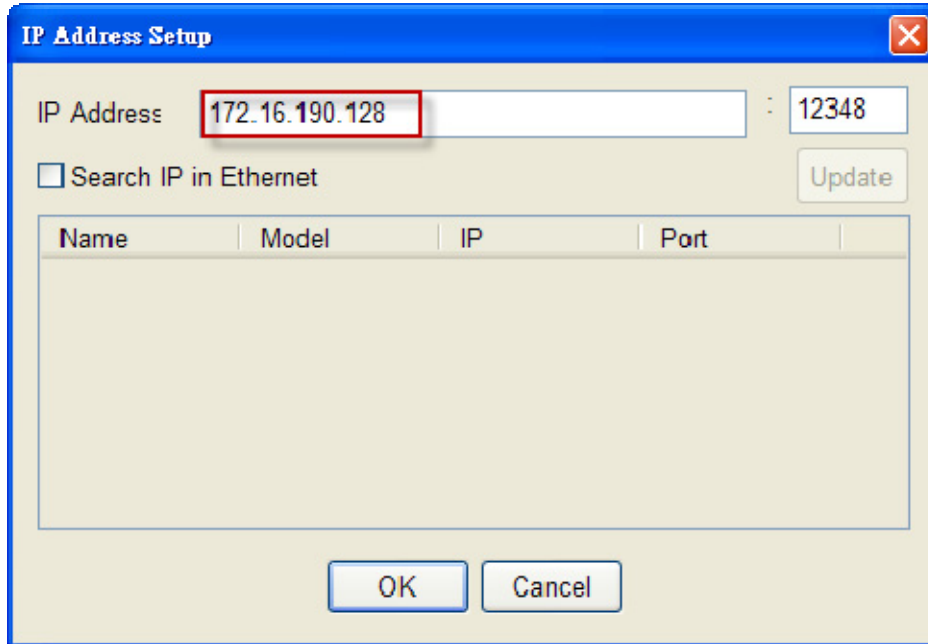


After connecting successfully, current connecting IP and port number will show on the title of the window.

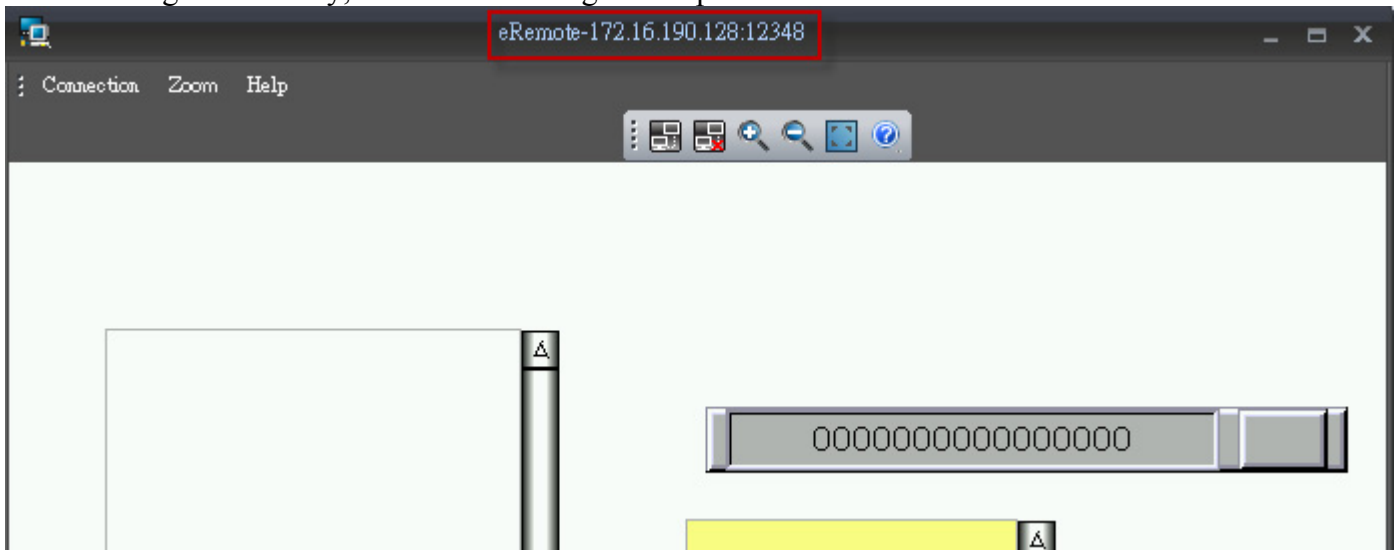


5. Add use the domain name to connect the HMI function.

Users can input the domain name of HMI and click “OK” button.

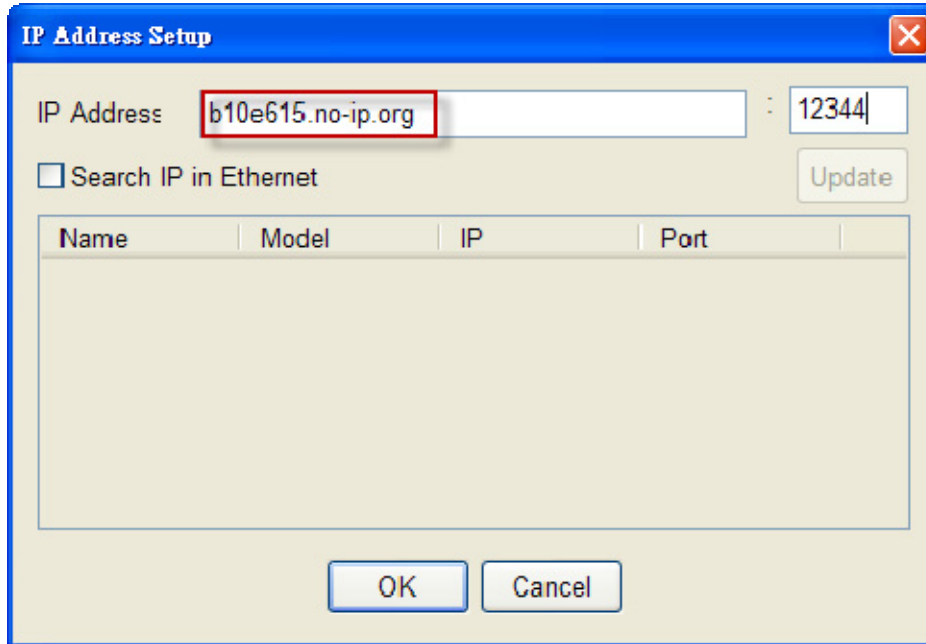

After connecting successfully, current connecting domain name and port number will show on the title of the window.

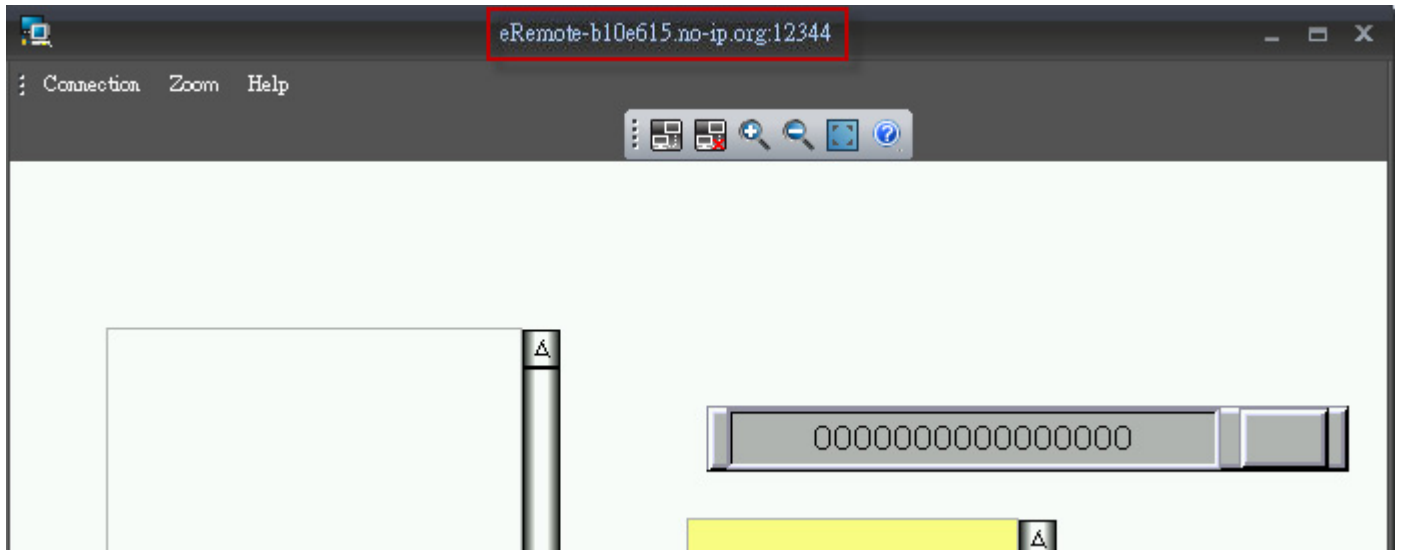


6. Support new elements of DOPSoft but not rotation function.


Support Analog element including Slider.




Support List element including ComboBox and ListBox.

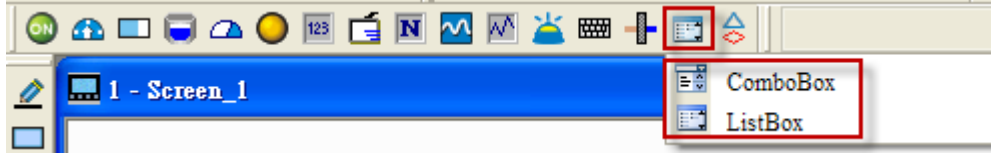


Support Basic shape element including Rhombus, Right Triangle, Pentagon, Pie Chart, Arc, Hexagon, Star Shape, Triangle, Hollow Circle, Stop Circle and 1/4 Arc.

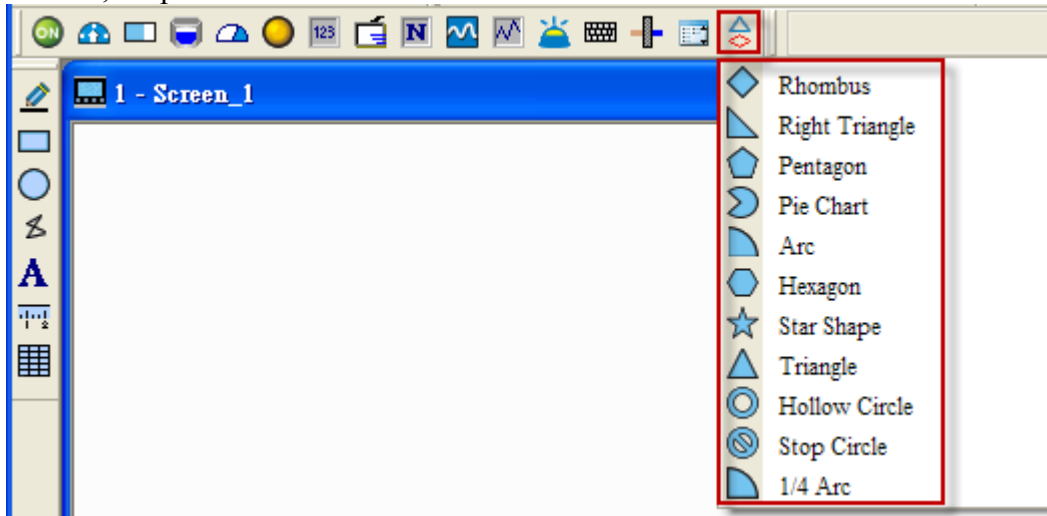

Not support screen rotation function, but support rotation of Right Triangle, Pipe(1), Pipe(2), Pipe(4) and Pipe(5).

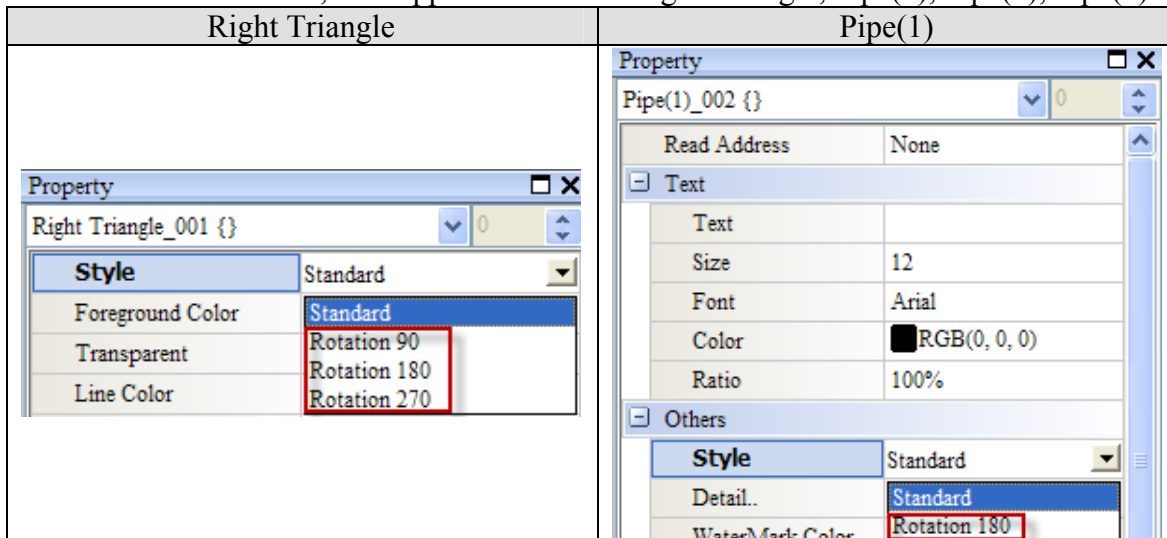

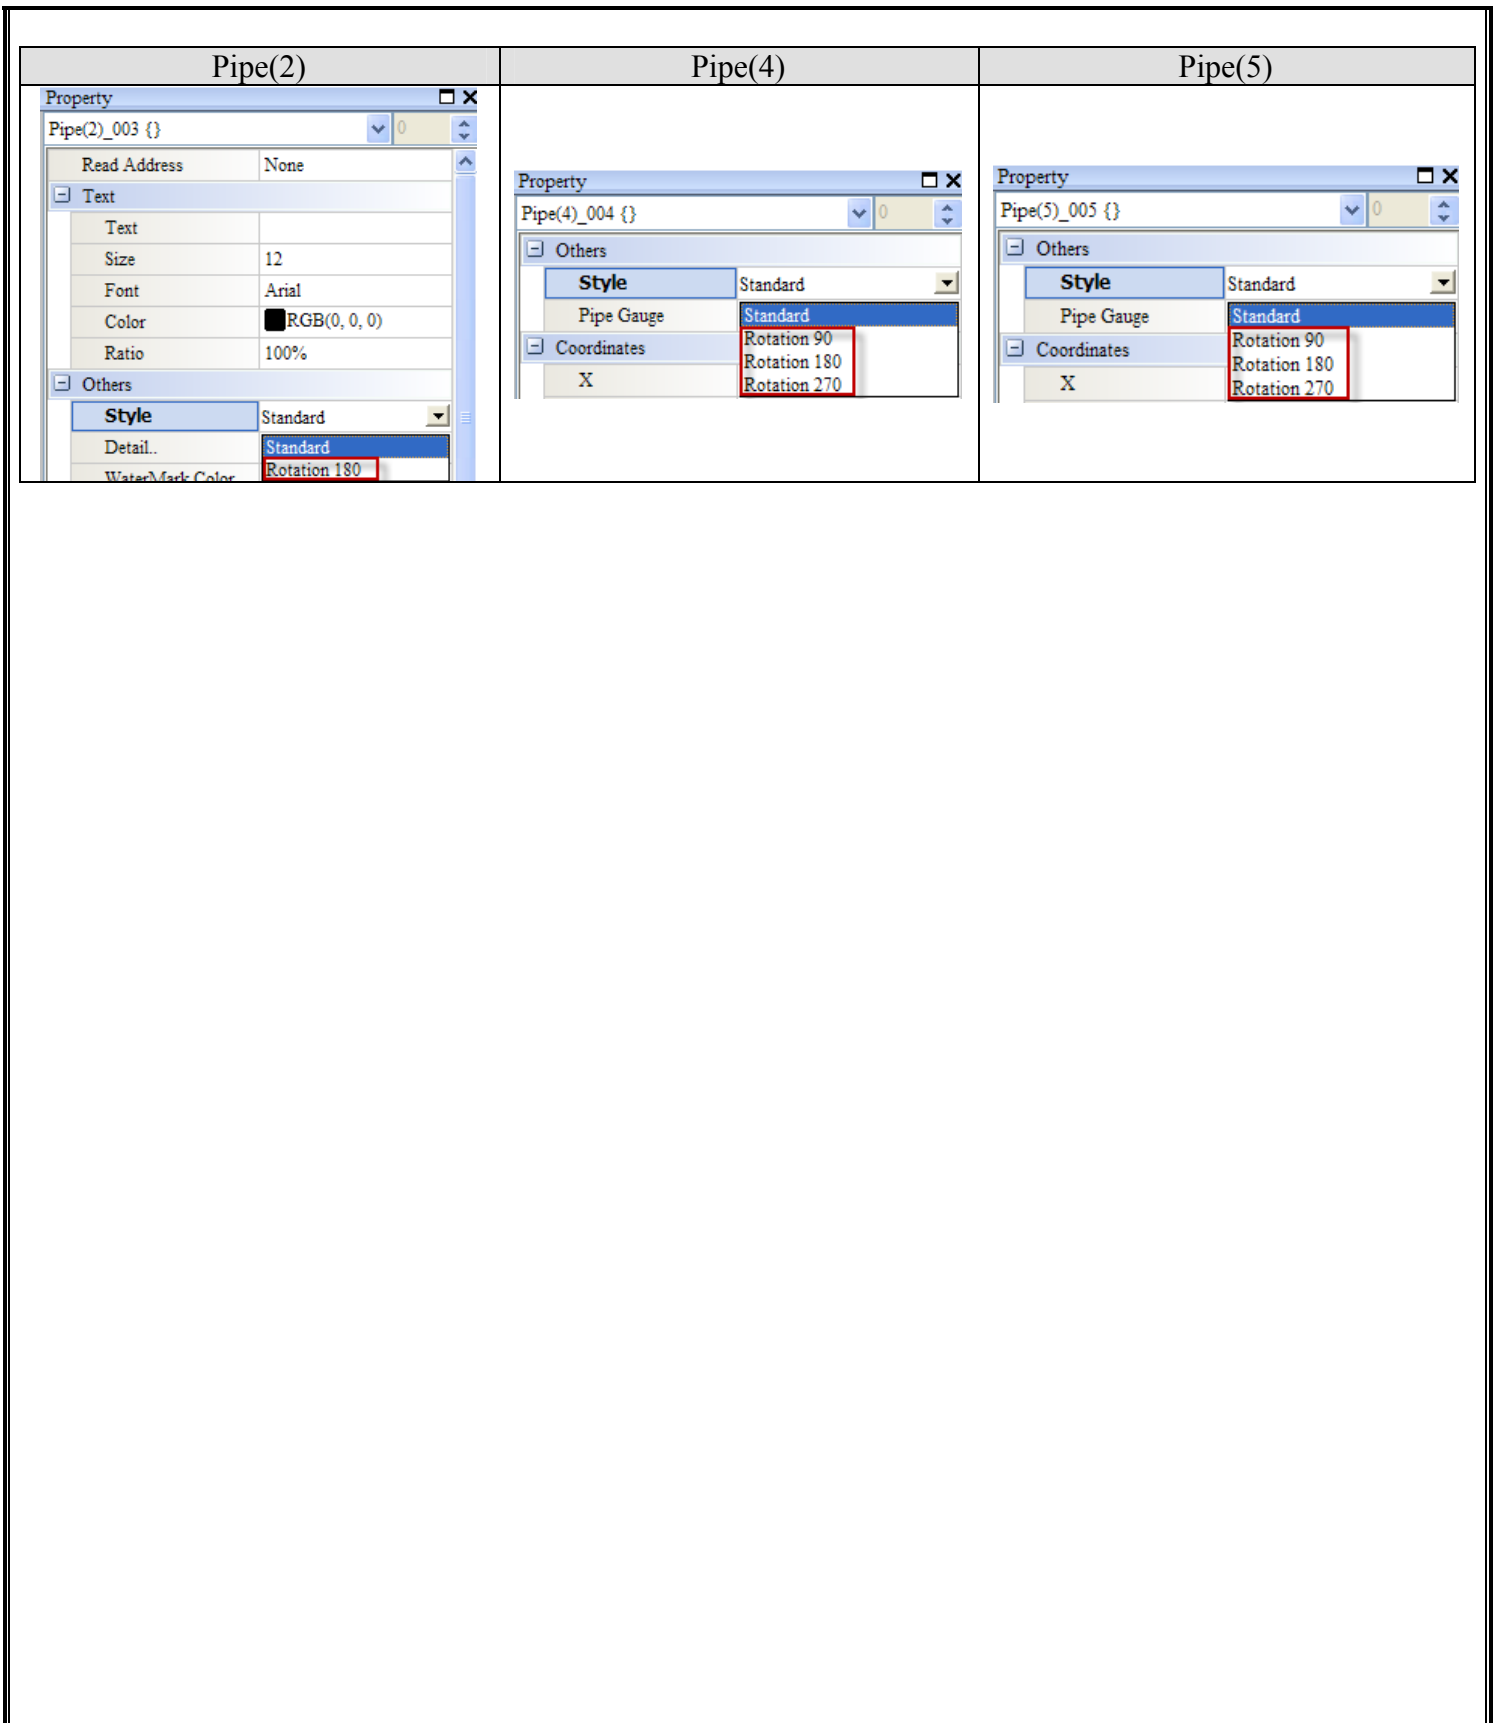


品質至上
信賴第一
追求卓越


QUALITY
RELIABILITY
EXCELLENT

7. Fixed show the password table wrong issue.

Step1. Select 『Options』 → 『Password setting』 to open the Password setting window.

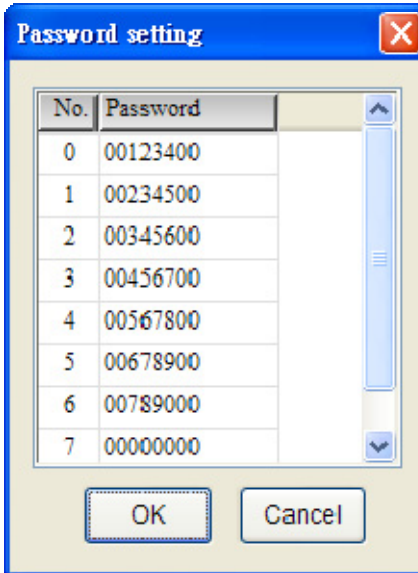


Step2. Add "Password Table Setup" button on the screen.

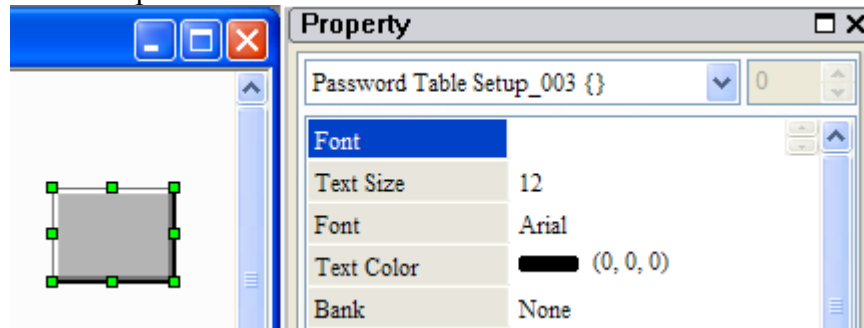

Step3. Download the project to HMI and make eRemote connecting to the HMI.

Status (Before):

Click the “Password Table Setup” button and passwords show wrong.

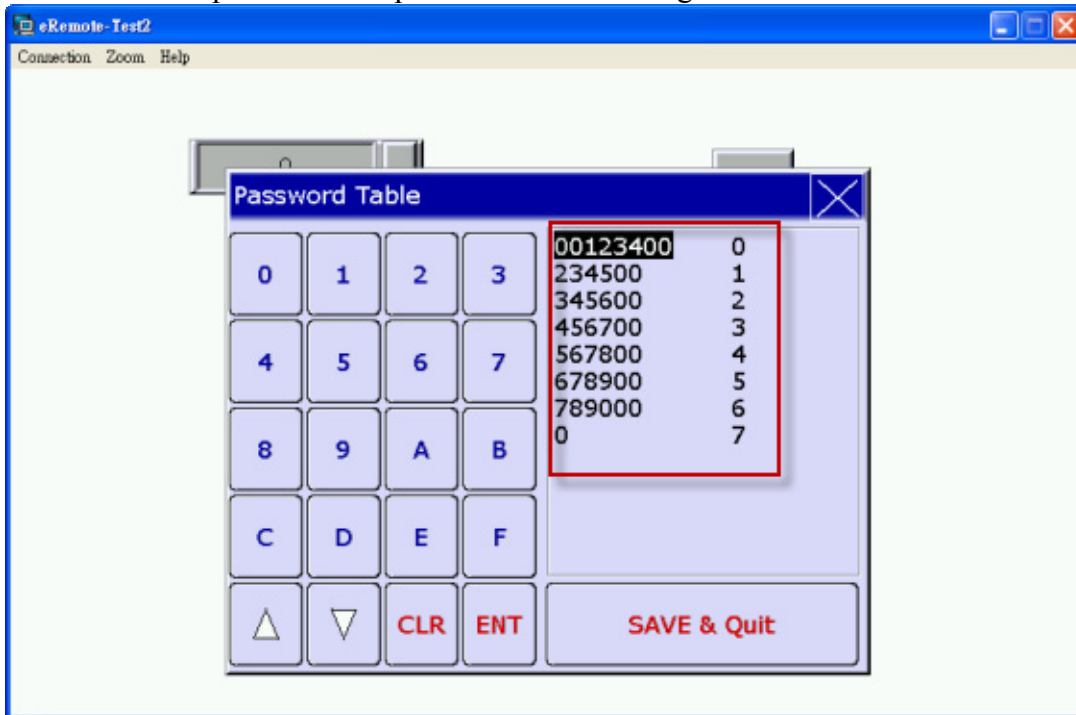

Correction(After):

This problem is corrected.

